

# Technical Data Sheet (TDS)

## Standard PETG

Eryone Standard PETG filament is an optimized printing material designed to effectively address common issues such as stringing, oozing, nozzle clogging, and jamming, resulting in a smoother printing process. It features excellent transparency and, compared to PLA, exhibits higher toughness and impact resistance, along with good water and weather resistance. This makes it suitable for a variety of applications, including printing flower pots, fixtures, and water valve switches.

### Part I: Suggests Printing Parameters

Parameter	Set up
Nozzle temperature	230-250 °C
Bed temperature	75-80°C
Bed material	glass, PEI, spring steel plate
Bottom printing temperature	230°C-250°C
Sealed printing	enclosed printing/open printing
Printing speed	30-80mm/s
Drying conditions	80°C, 12h

### Part II: Physical Properties of Materials

Property	Testing Method	Unit	Typical Value
Density(g/cm <sup>3</sup> at 21.5 ° C)	ASTM D792 (ISO 1183, GB/T 1033)	g/cm <sup>3</sup>	1.25
Vicat Softening Temperature(° C)	ASTM D1525 (ISO 306 GB/T 1633)	°C	78
Heat distortion temperature(° C)	ASTM D648 1.8MPa 0.45MPa	°C	67
Glass transition temperature (° C)	DSC, 10 ° C/min	°C	68
Melt Index(g/10 min)	220 ° C, 10kg 240 ° C, 2.16 kg	g/10min	18±2



### Part III: Mechanical Properties of Printed Samples

Property	Test conditions	Test standards	unit	Typical Value
Tensile strength X-Y	50mm/min	GB/T 1040.4	MPa	47.5
Elastic modulus X-Y	50mm/min	GB/T 1040.1-2006	MPa	1242.5
Elongation at break X-Y	50mm/min	GB/T 1040.4	%	4.8
Tensile strength X-Z	50mm/min	GB/T 1843	MPa	25.7
Elastic modulus X-Z	50mm/min	GB/T 1040.1-2006	MPa	852.1
Elongation at break X-Z	50mm/min	GB/T 1040.4	%	2.9
Bending strength	2mm/min	GB/T 9341	MPa	77.1
Bending modulus	2mm/min	GB/T 9341	MPa	2073.2
Charpy Impact strength	2.75J	GB/T 1843	kJ/m2	2.63

Note: All splines are printed under the following conditions: printing temperature=240 ° C, printing speed=80mm/s, base plate 60 ° C, filling=100%, nozzle diameter=0.4mm



## TENSILE TESTING SPECIMEN

ISO 527,GB/T 1040

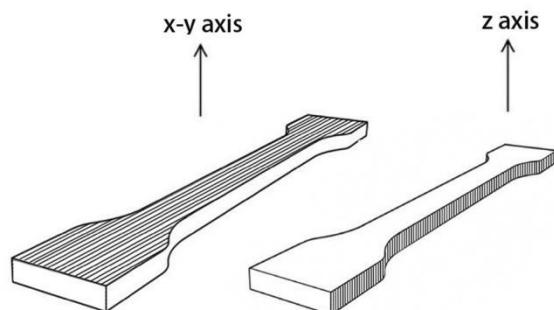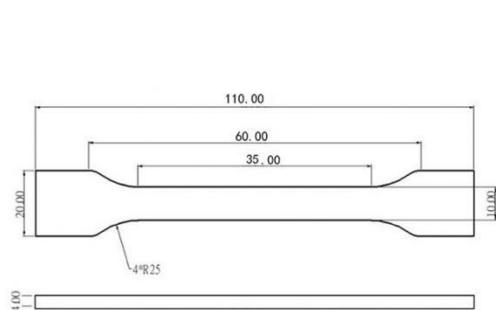



## FLEXURAL TESTING SPECIMEN

ISO 178,GB/T 9341

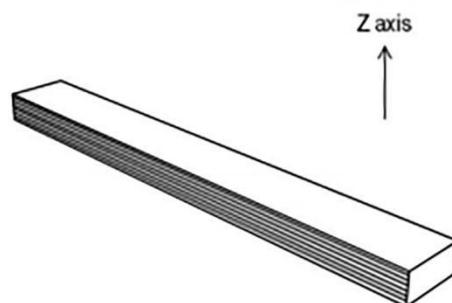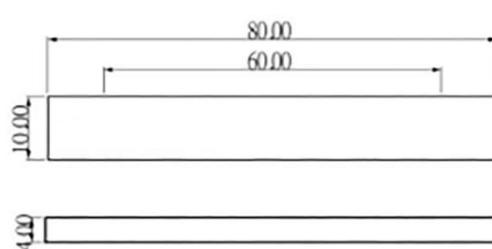

## IMPACT TESTING SPECIMEN

ISO 179,GB/T 1043

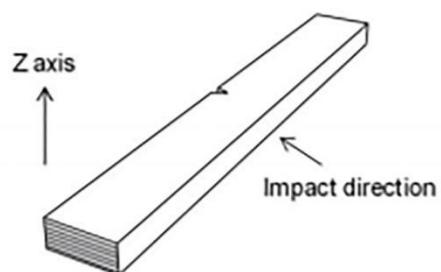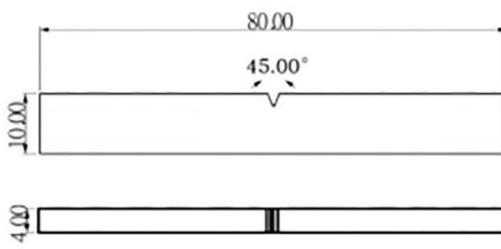

## Disclaimers

The values given in this data table are for reference and comparison only. They should not be used for design specifications or quality control. The actual value may vary depending on the printing conditions. The final performance of printed components depends not only on the material, but also on the component design, environmental conditions, printing conditions, and so on. Product specifications are subject to change without prior notice.